

UPGRADABLE

NEW



**MADE
IN USA**

HUNTER ENGINEERING COMPANY ST. LOUIS, MO

NEW

QuickGrip® wheel adaptors & high-definition targets



Hunter's patented QuickGrip® adaptors and high-definition targets accelerate service with set-up times in seconds instead of minutes...



PATENTED Extremely Fast Installation

- ✓ Spring-loaded arms grip the tire
- ✓ Thumb switch secures the clamp
- ✓ Off-center clamping has no effect on accuracy



PATENTED Avoid Damage to Expensive Rims

- ✓ Grips tire, not rim
- ✓ No metal-to-metal contact
- ✓ Only protective ring contacts rim



PATENTED Less Weight

- ✓ Weighs only 3.3 kg (7.4 lbs.)
- ✓ Nearly 40% lighter than previous designs



EXCLUSIVE QuickComp!

Compensate all wheels and capture initial measurements in one motion.



PATENTED Low Maintenance

- ✓ Shop-tough polymer structure withstands drops
- ✓ No electronics, cables or calibration
- ✓ Only occasional cleaning required

PATENTED Revolutionary adaptor design!



- ✓ Faster setups!
- ✓ No metal-to-metal contact!
- ✓ No knob twisting!

PATENTED Quick-Change Hooks



- ✓ Interchangeable hooks cover up to 940 mm (37 in.) assemblies
- ✓ One set of hooks fits most applications

PATENTED Deep-Wheel Extension



- ✓ Deep rims or protruding hubs, no problem
- ✓ Standard accessory




Powerful software features reduce alignment times and increase productivity!



EXCLUSIVE

WinToe® Adjustments

Ensure a straight steering wheel every time without repeated adjustments or using a steering wheel holder.

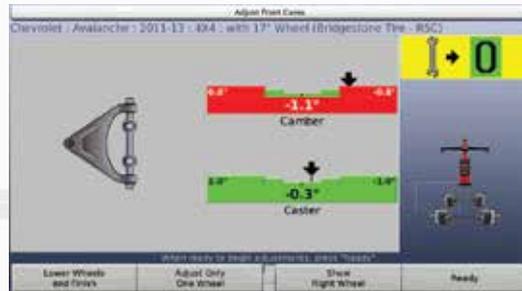

EXCLUSIVE

Control Arm Movement Monitor

Cut adjustment times in half for front-shim, dual-cam or dual-slot vehicles. Step-by-step graphics let you get it right on the first try.



Shim-Select® II



Eliminate confusing shim charts and tables. Shim-Select® II quickly calculates and displays the template you need for proper shim installation.



Easy-To-Follow Illustrations

Over 500 adjustment illustrations provide diagrams and instructional information of recommended Original Equipment Manufacturer (OEM) adjustment methods.

Software Supported
In Bahasa

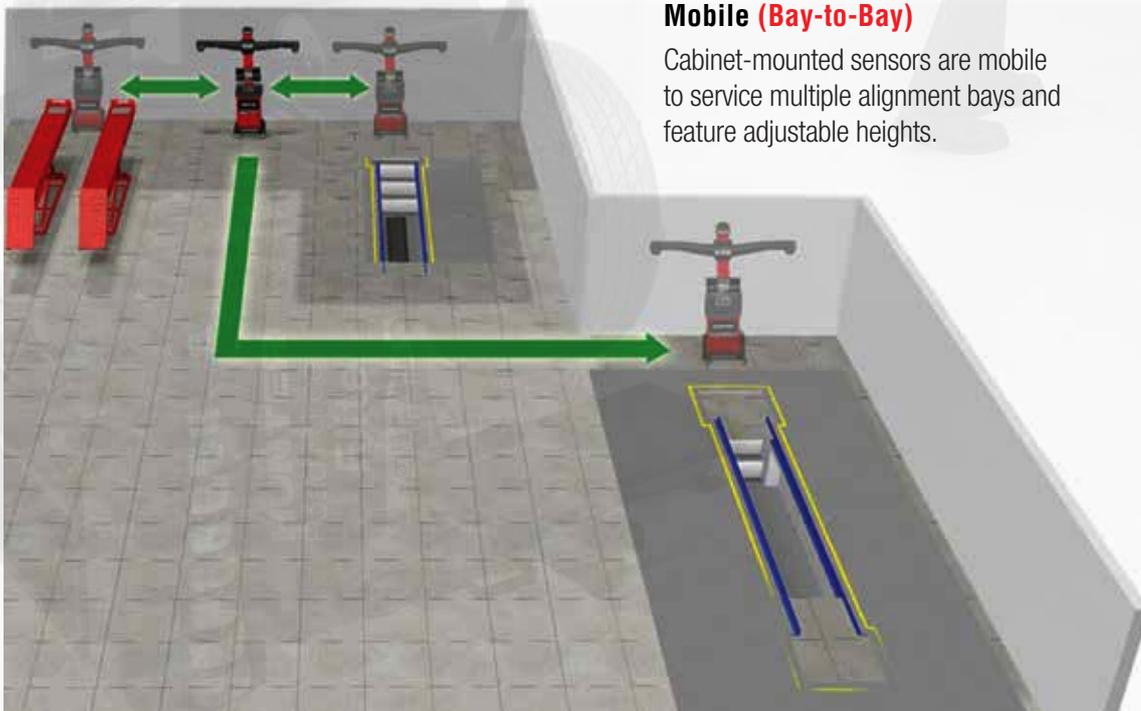

Mobile (Bay-to-Bay)

Cabinet-mounted sensors are mobile to service multiple alignment bays and feature adjustable heights.

Perform alignments at **ANY** height

The versatility of the HawkEye® digital imaging technology allows shops to perform alignments on the floor or at any lift height.



Camera height is easily adjusted from the side of the unit.



PATENTED

Reduce **long-term** cost of ownership

The reflective wheel targets provide a low cost of ownership and require virtually no maintenance.

- ✓ No electronics at the wheel
- ✓ No cables or batteries
- ✓ No downtime from accidental drops

Alignment measurements **in just minutes!**

ProAlign® alignment systems using HawkEye® digital imaging technology offers shops alignment service optimized for speed and efficiency with simple operation and low cost of ownership.

Digital cameras measure the position and orientation of the wheels with pinpoint accuracy using reflective targets.



1. **Select the Vehicle**

- ✓ Recall specifications




2. **Measure Angles**

- ✓ Install targets
- ✓ Capture measurements
- ✓ Review "before" results



3. **Make Adjustments**

- ✓ Follow the adjustment instructions
- ✓ Print before-and-after results

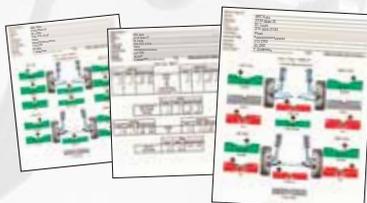

Present Your Results!

- ✓ Sell more alignments
- ✓ Generate greater profits

Hunter ProPlus Specifications

Weight of Target	3 kg (6 lbs)
Profile of Target	457 mm (18 in.)
Installation Time	5 seconds
Rolling Compensation Style	Forward
Camera Resolution	2,608 x 1,952 (10.000.000 px)

Track Width	2032 mm (80 in.)
Wheel Base	3300 mm (130 in.)
Distance to Wall	1651 - 2464 mm (65 - 97 in.)
Suggested Distance	2464 mm (97 in.)
Short Bay Distance	1651 mm (65 in.)

Hunter ProPlus Dimensions

Width (W1)	2667 mm 105 in.
Height (H1)	2680 mm 105.5 in.
Width (W2)	813 mm (32 in.)
Height (H2)	1651 - 1727 mm (65 - 68 in.)
Depth (D)	635 mm 25 in.
LCD	28" Widescreen
Vertical Camera Movement Range	1524 - 2426 mm (60-95.5 in.) (from floor)



Jakarta Head Office

Jl. Pluit Barat I No. 29 Pluit, Penjaringan, DKI Jakarta
 Email : sales@himawarputra.co.id
 Sales : (021) 666 01 222
 Aftersales : (021) 666 01 333



www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA
 Tel: 314-731-3020, Fax: 314-731-0132
 Email: international@hunter.com